


GARBAGE BIN CARRIER



Main Parameters

Items		FLM5030CTYCC6	FLM5070CTYQL6
GVW	kg	2840	7300
Wheelbase	mm	2990	3815
Payload Weight	kg	1230	3840
Upper Weight	kg	480	1130
Upper Transportation Dimensions	mm	3060×1580×1740	5240×1930×1850
Max Speed	km/h	100	95
Selectable Of Chassis Brand		CHANGAN/DONGFENG/FOTON	ISUZU
Quantity Of Bins	PCS	MGB120L 15 MGB240L 8 MGB660L 3	MGB240L 21 MGB660L 7
Hydraulic System Pressure	MPa	14	14
Max Lifting Ability	kg	≥300	1000
Cycle Time Of One Operation	s	≤30	≤30
Max Angle Of Rear Tailboard		90°	90°

Technical Specification

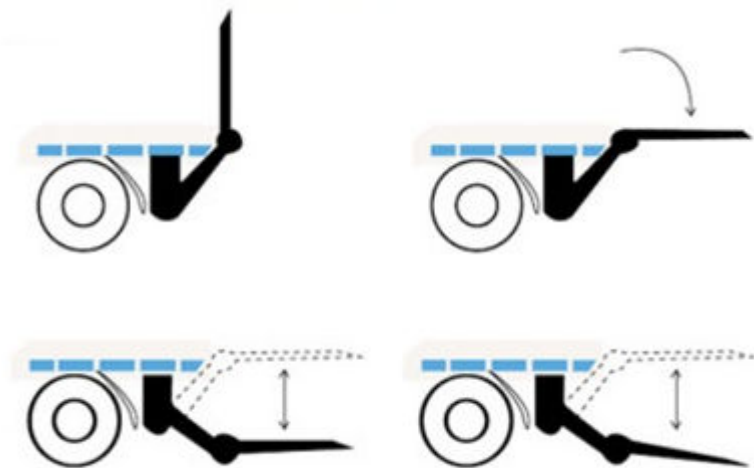

Base Specification

Control system:

- There are two kinds of electric control operation modes, fixed and wired, which are simple and convenient.

Other advantages:

- Flexible shipment and large transportation range greatly expand the collection area of barreled garbage, and adopt the overall transport of garbage cans, without sewage leakage and garbage scattering.
- No additional protection is required, and the vehicle can be parked on the flat road for loading and unloading.
- The carriage adopts side turning rail plate, which is convenient for empty bucket handling and other handling methods, and improves efficiency.

Safety:

- Several measures are taken for safety protection: independent switch is set for tailboard power supply; reflective warning board and safety chain are installed on lifting tailboard.

Tail-board Lifting Device:

- Adopt electric control hydraulic tail plate lifting device, reduce labor intensity and work efficiency.

Optional device:

- The garbage can positioning rod can be installed on the carriage to position the garbage can in the carriage, so as to avoid the self-sliding of the garbage can during the driving of the vehicle.
- The tailboard can be equipped with a control system for the lowering speed of the lifting tailboard, which can flexibly adjust the lowering speed of the tailboard and improve the working efficiency.
- Optional wireless remote control handle, easy to operate.
- FLM5070CTYQL6:
 - 1.High pressure cleaning system can be selected, and the vehicle and garbage can be cleaned as required.
 - 2.Can be equipped with widened car body.
 - 3.It can also be selected the tailboard provided by CADRO company, a professional manufacturer of lifting tailboard.
 - 4.Optional bolt connection material aluminum alloy side protection.